

POST FLASHING

DETAIL 2A


FACE NAIL (A MIN. OF TWO NAILS PER SIDE) AT THE FLASHING ON EACH SIDE OF POST

FLASHING IS SECURED TO SUBFLOOR WITH NAILS ON ALL SIDES

GALVANIZED, 26 GAUGE, FLAT METAL INSTALLED ON ALL CORNERS OF THE POST AND NAILED TO THE SUBSTRATE

APPLY MANUFACTURER RECOMMENDED JOINT SEALANT BEHIND FLASHING AND AT THE TOP OF THE FLASHING.

APPLY MANUFACTURER RECOMMENDED JOINT SEALANT AFTER COMPLETION OF THE PLI-DEK BASE COAT AROUND BASE OF POST. PLI-DEK SYSTEM TERMINATES AT THIS POINT GS88 TO BE COATED ON ALL VERTICAL FLASHING

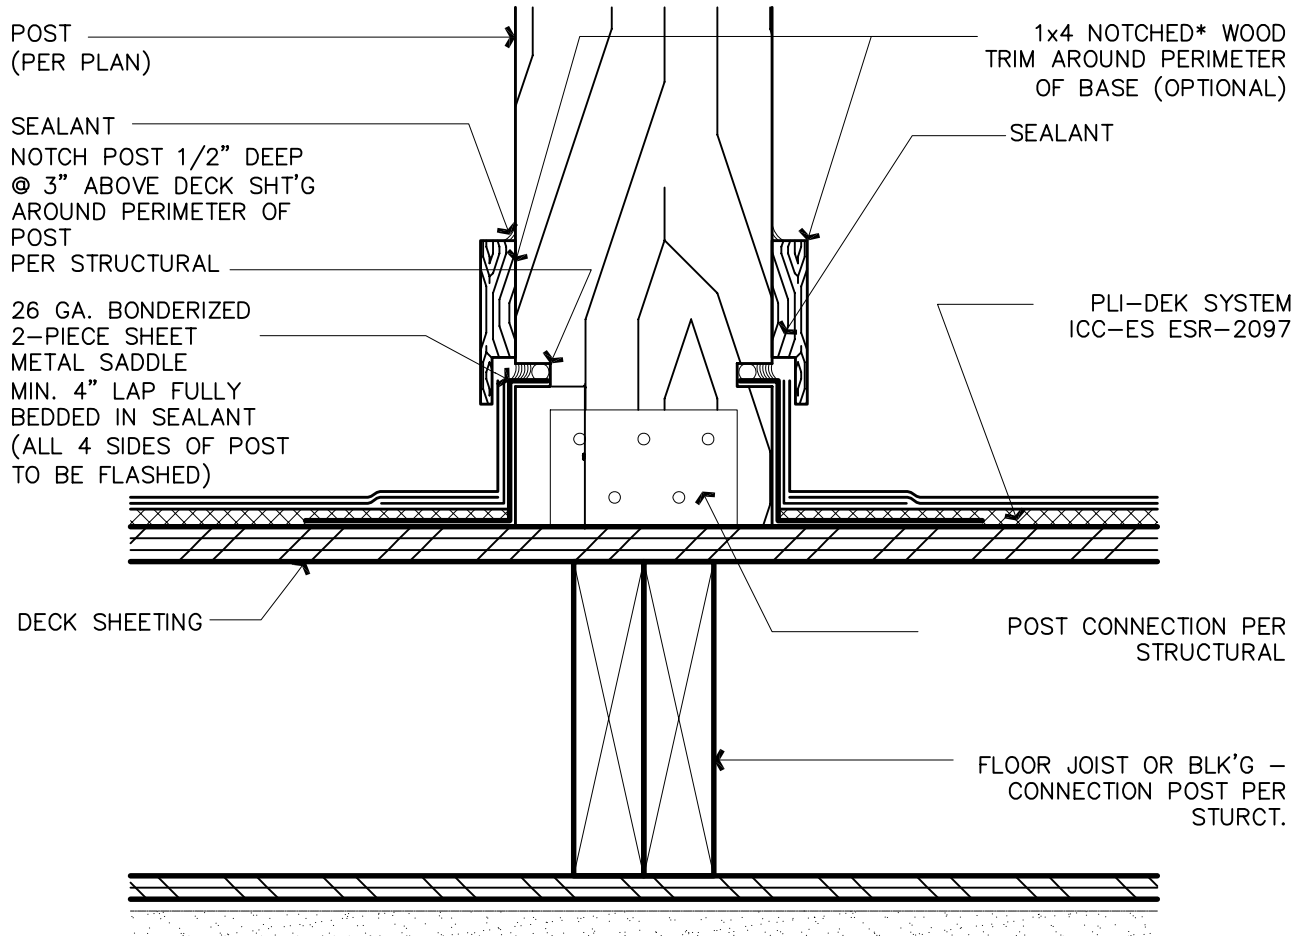

*MAY APPLY GU80 BASE COAT AT POST BASE TO DIVERT WATER