

### Description

Extruded Aluminum Stair Nosing integrates with the Waterproof Pli-Dek System to add strength and protection to the Pli-Dek Application. The Pli-Dek Aluminum Stair Nosing is designed to be embedded into the system, thus adding protection from surface penetrations, rust, and trip hazards.

### Uses

Pli-Dek Stair Nosing is a recommended option as shown in Pli-Dek System Detail PD-SA-4.

### Storage

Avoid damage and store in a dry place from moisture.

### Material Information

Mill Length	Approx. 4 ft. *
Minimum Order	3 Pieces
Material	Aluminum (6063)
* +.125 - .000 Cutting Tolerance	
*Custom lengths available up to 12 ft.	

### Advantages


- Long Term Cost Effectiveness
- Added Protection
- Non Corrosive
- Decorative

### CAUTION:

Edges of the Stair Nosing can be sharp and gloves are recommended when handling this material to prevent cuts and abrasions. Always wear protective goggles and mask when cutting the Stair Nosing. For Professional use only.

### Application

1. Install sheet metal flashing as per Pli-Dek specification.
2. Install the 2.5 galvanized metal lath and GU80 Base Coat on the entire stairway.
3. Install 3/4 ounce fiberglass and PD Resin on the entire stairway.
4. Install the stair nosing by applying urethane caulking to the bottom side of the horizontal leg and screw into stair tread.
5. Install 3/4 ounce fiberglass and PD Resin over the horizontal leg of the stair nosing and onto the stair tread.
6. Apply the GU80 Gray Base to "float" out the tread to attain positive slope over the stair nosing.
7. Apply the desired finish coat.

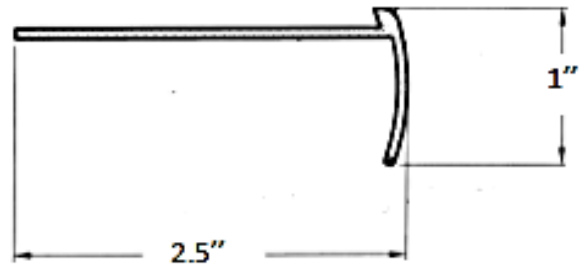

### Disclaimer:

*This information is furnished without warranty, representation, inducement or license of any kind, except sources believed by Pli-Dek Systems, Inc. to be accurate. Pli-Dek Systems, Inc. does not assume any legal responsibility for use or reliance on the information supplied here.*

