

APPLY ASTM C-920 POLYURETHANE SEALANT TO THE INSIDE AND OUTSIDE OF THE FASTENER/PENETRATIONS AS WELL AS UNDER THE BASE PLATE AND AROUND THE PERIMETER OF THE BASE PLATE. SEALANT WILL NEED TO BE MAINTAINED YEARLY. (BOLT INSTALLATION IS RESPONSIBILITY OF RAIL INSTALLER)

GU80 TOP COAT COVER OVER PLATE AND BOLTS

TRU-BOLTS OR LAG BOLTS PER STRUCTURAL PLAN

PLAN VIEW


BASE PLATE & STEEL POST (BY OTHERS)

GU80 PRIMER

3/4 OZ. FIBERGLASS & PD RESIN (2 COATS)

GU80 TOP COAT

GS88 PIGMENTED SEALER

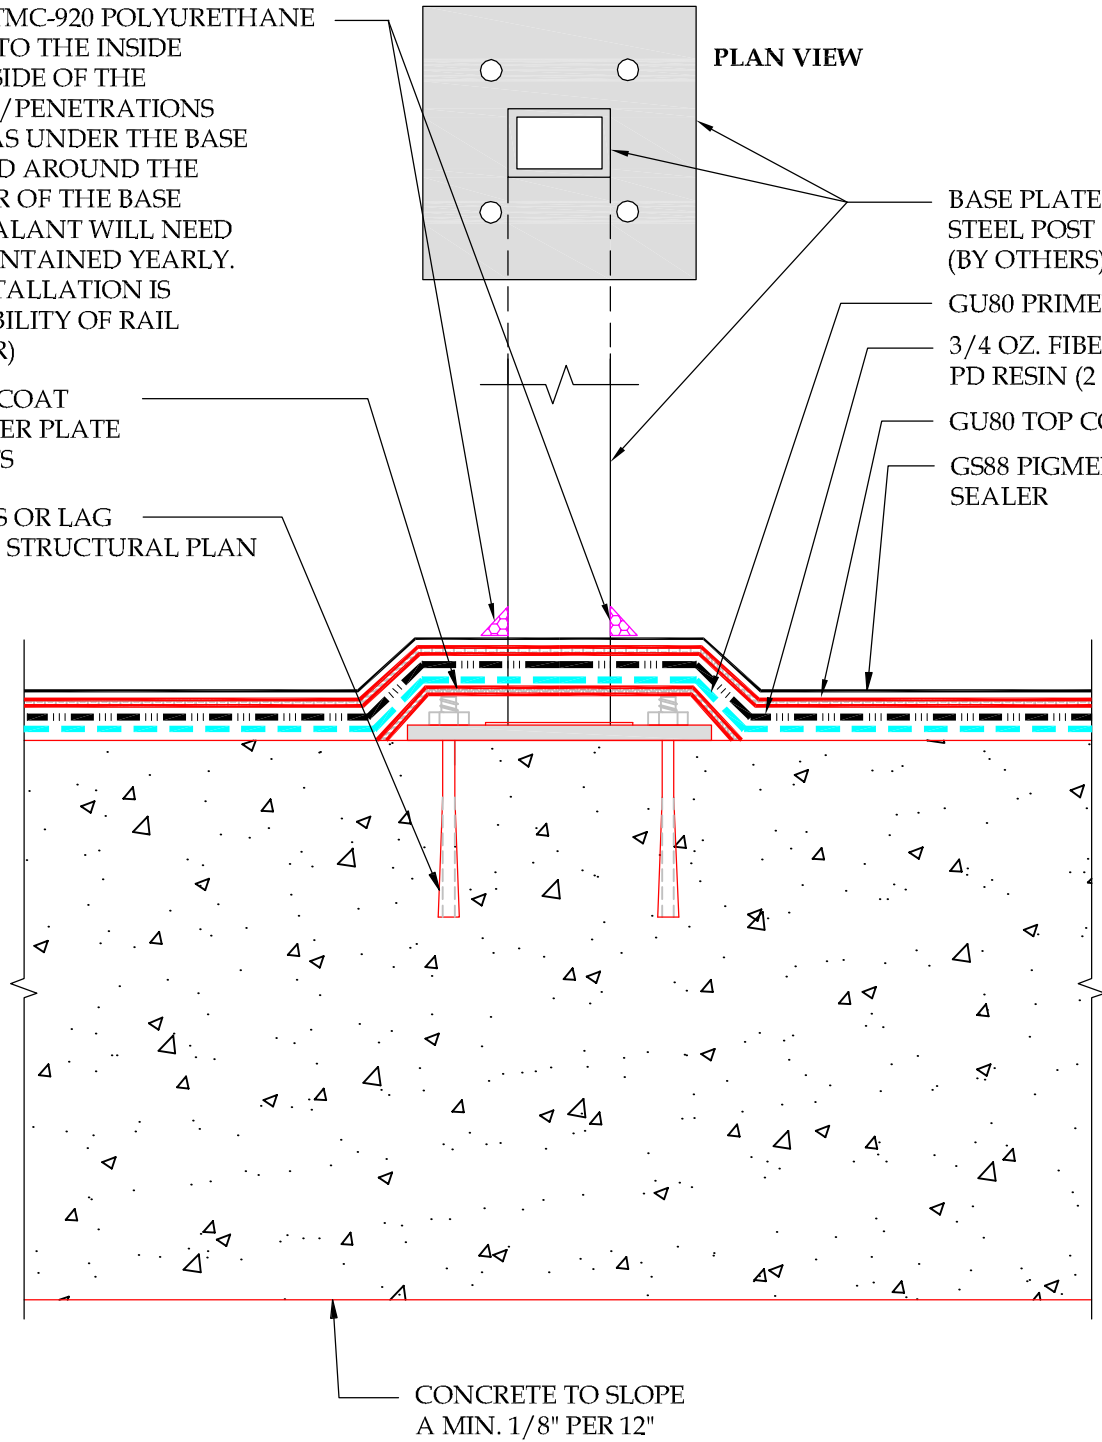

CONCRETE TO SLOPE A MIN. 1/8" PER 12"

DETAIL-METAL DECK RAIL-UNDER WATERPROOFING MEMBRANE

SCALE: N.T.S.



41610 Date St., Suite 104 * Murrieta, CA. 92562
 Phone: 800.364.0287 * Fax: 951.834.9555
 WWW.PLIIDEK.COM

These waterproofing procedures are not to be used for permit and should be reviewed by the project architect. The waterproofing procedures are not complete plans or specifications and a professional design professional should be contacted prior to performing major waterproofing and repairs.

System: Con-Dek System by Pli-Dek Systems, Inc.
 Detail: ICC-ES ESR-2097 METAL DECK RAIL UNDER WATERPROOFING MEMBRANE

Job: _____
 Date: 05-3-2013
 Dwn: H.K

Drawing Number:
CD-8B