

### Description:

The Pli-Dek Extruded Aluminum Stair Nosing integrates with the Pli-Dek Waterproof Deck Coating Systems to add strength and protection to the application. The Pli-Dek Stair Nosing is designed to be embedded into the system, thus adding protection from surface penetrations, rust, and trip hazards.

### Uses:

- Pli-Dek System

### Advantages:

- Long Term Cost Effectiveness
- Added Protection
- Non Corrosive
- Decorative

### Packaging:

Mil Length:       Approx. 4ft\*  
Min. Order:       3 pieces  
Material: Aluminum (6063)  
\*+/- .125 -.000 Cutting Tolerance  
Custom Lengths up to 12' available

### Storage:

Avoid damage and store in a dry place from moisture.

### Installation Instructions:

#### Surface Preparation:


Install sheet metal flashing as per Pli-Dek specification. Install the 2.5 galvanized metal lath and GU80 Base Coat on the entire stairway. Install ¼ oz. fiberglass and PD Resin on the entire stairway.

#### Installation:

Install the stair nosing by applying urethane caulking to the bottom side of the horizontal leg and screw into stair tread. Install ¼ oz. fiberglass and PD Resin over the horizontal leg of the stair nosing and onto the stair tread. Apply the GU80 Gray Base to "float" out the tread to attain positive slope over the stair nosing. Apply the desired finish coat.

#### CAUTION:

**Edges of the Stair Nosing can be sharp and gloves are recommended when handling this material to prevent cuts and abrasions. Always wear protective goggles and mask when cutting the Stair Nosing. For Professional use only.**

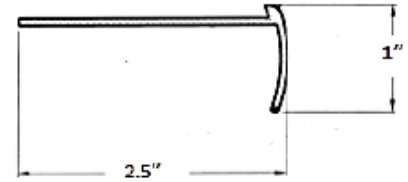

### Disclaimer:

*\*This information is furnished without warranty, representation, inducement or license of any kind, except sources believed by Pli-Dek Systems, Inc. to be accurate. Pli-Dek Systems, Inc. does not assume any legal responsibility for use or reliance on the information supplied here.*

### Technical Assistance:

Contact Pli-Dek Systems, Inc. for any job specific questions.

