


APPLY ASTM C-920 POLYURETHANE SEALANT




PLAN VIEW

ATTACHMENT OF RAIL  
TO BE SEALED WITH ASTM-C-920  
POLYURETHANE SEALANT

5/8" MIN. EXPOSURE 1 SHEATHING  
(3/4" RECOMMENDED) SLOPE 1/4"  
PER 12"

- GS88 PIGMENTED SEALER
- GU80 TOP COAT
- 3/4 OZ. FIBERGLASS & PD RESIN (CONTACT PLI-DEK FOR REQUIREMENTS)
- GU80 BASE COAT
- 2.5 GALVANIZED METAL LATH

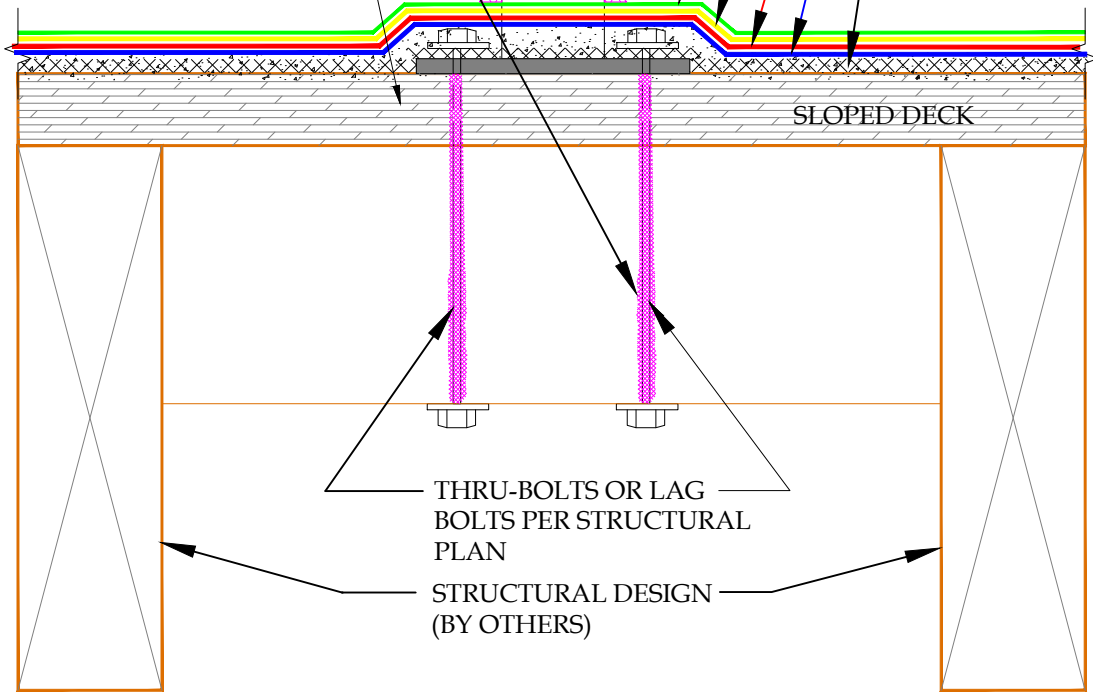

THRU-BOLTS OR LAG  
BOLTS PER STRUCTURAL  
PLAN

STRUCTURAL DESIGN  
(BY OTHERS)

**DETAIL-METAL DECK RAIL-UNDER WATERPROOFING MEMBRANE**

SCALE: N.T.S.



**PLI-DEK**  
WATERPROOFING SOLUTIONS  
150 Dascomb Rd., Andover, MA 01810  
Phone: 800.364.0287 \* Fax: 951.834.9555  
WWW.PLI-DEK.COM

These waterproofing procedures are not to be used for permit and should be reviewed by the project architect. The waterproofing procedures are not complete plans or specifications and a professional design professional should be contacted prior to performing major waterproofing and repairs.

System:		Pli-Dek System ICC-ES ESR-2097	
Detail:		METAL DECK RAIL - UNDER WATERPROOFING MEMBRANE	
Job:		Drawing Number:	
Date:	11/01/2020	PD-17B	
Dwn:	E.L.		