


APPLY ASTM C-920 POLYURETHANE SEALANT




PLAN VIEW

NEOPRENE OR EPDM GASKET (OPTIONAL)

ASTM C-920 POLYURETHANE SEALANT (PRE-DRILL PILOT HOLE AND FILL WITH ASTM C-920 POLYURETHANE SEALANT BY OTHERS)

5/8" MIN. EXPOSURE 1 SHEATHING (3/4" RECOMMENDED) SLOPE 1/4" PER 12"

- GS88 PIGMENTED SEALER
- GU80 TOP COAT
- 3/4 OZ. FIBERGLASS & PD RESIN
- GU80 BASE COAT
- 2.5 G90 GALVANIZED METAL LATH

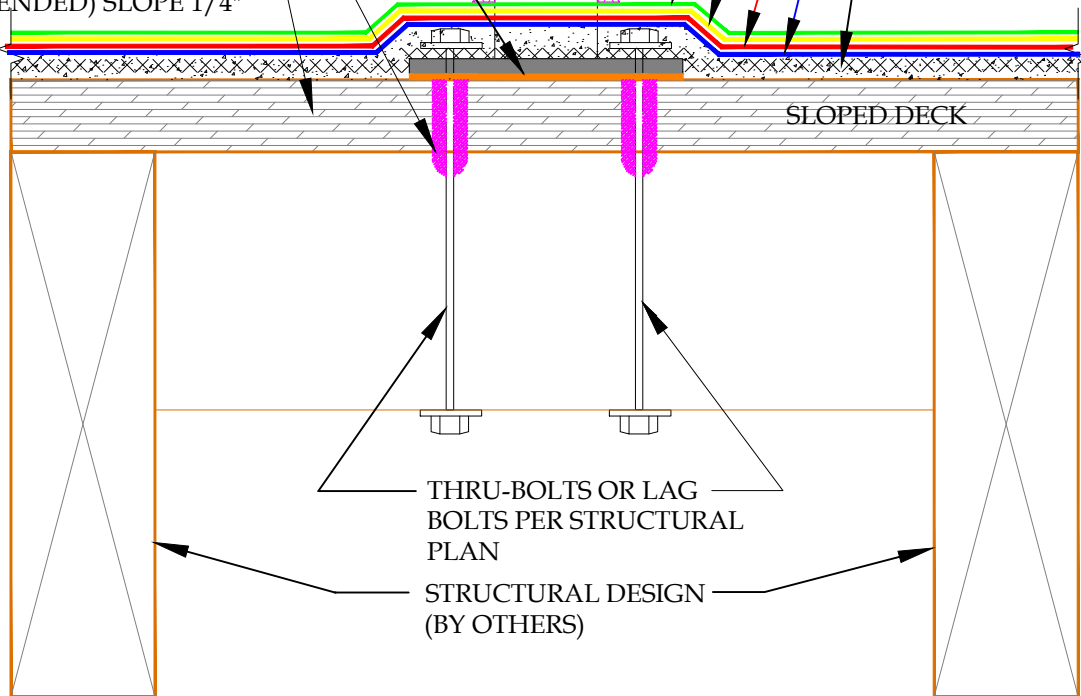

THRU-BOLTS OR LAG BOLTS PER STRUCTURAL PLAN

STRUCTURAL DESIGN (BY OTHERS)

DETAIL-METAL DECK RAIL-UNDER WATERPROOFING MEMBRANE  
SCALE: N.T.S. INCLEMENT WEATHER



**PLI DEK**  
WATERPROOFING SOLUTIONS  
41610 Date St., Suite 104 \* Murrieta, CA. 92562  
Phone: 800.364.0287 \* Fax: 951.834.9555  
WWW.PLIIDEK.COM

These waterproofing procedures are not to be used for permit and should be reviewed by the project architect. The waterproofing procedures are not complete plans or specifications and a professional design professional should be contacted prior to performing major waterproofing and repairs.

System:		Pli-Dek System ICC-ES ESR-2097	
Detail:		METAL DECK RAIL - UNDER WATERPROOFING MEMBRANE INCLEMENT WEATHER	
Job:		Drawing Number:	
Date:	04/01/2019	PD-17B-IW	
Dwn:	E.L.		